
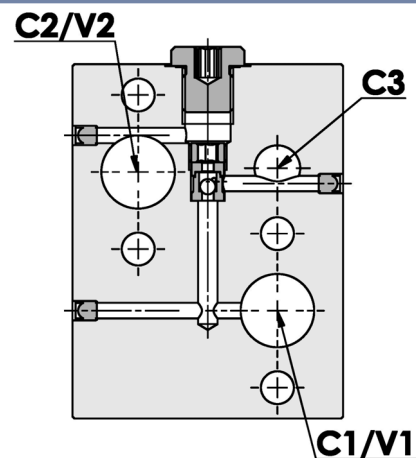


Valvola selettoria, flangiabile su motori Danfoss serie "OMP/OMR/OMH"
Shuttle valve, flangeable on Danfoss motors "OMP/OMR/OMH" series

Rev.01-2010/02

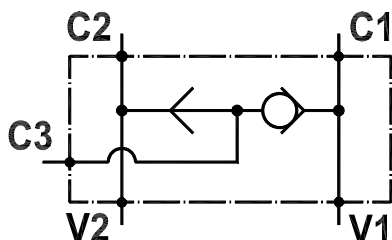

SPECIFICHE TECNICHE

Materiali: Corpo in lega di alluminio, parti interne in acciaio trattato termicamente.

Portata max.: 60 l/min

Taratura max.: 250 bar

Peso: 0,514 Kg

TECHNICAL SPECIFICATIONS

Materials: body is in high strenght aluminium alloy, internal parts in hardened steel.


Rated flow: 60 l/min

Max. setting: 250 bar

Weight: 0,514 Kg

Valvola selettiva, flangiabile su motori Danfoss serie "OMP/OMR/OMH"
Shuttle valve, flangeable on Danfoss motors "OMP/OMR/OMH" series

Rev.01-2010/02

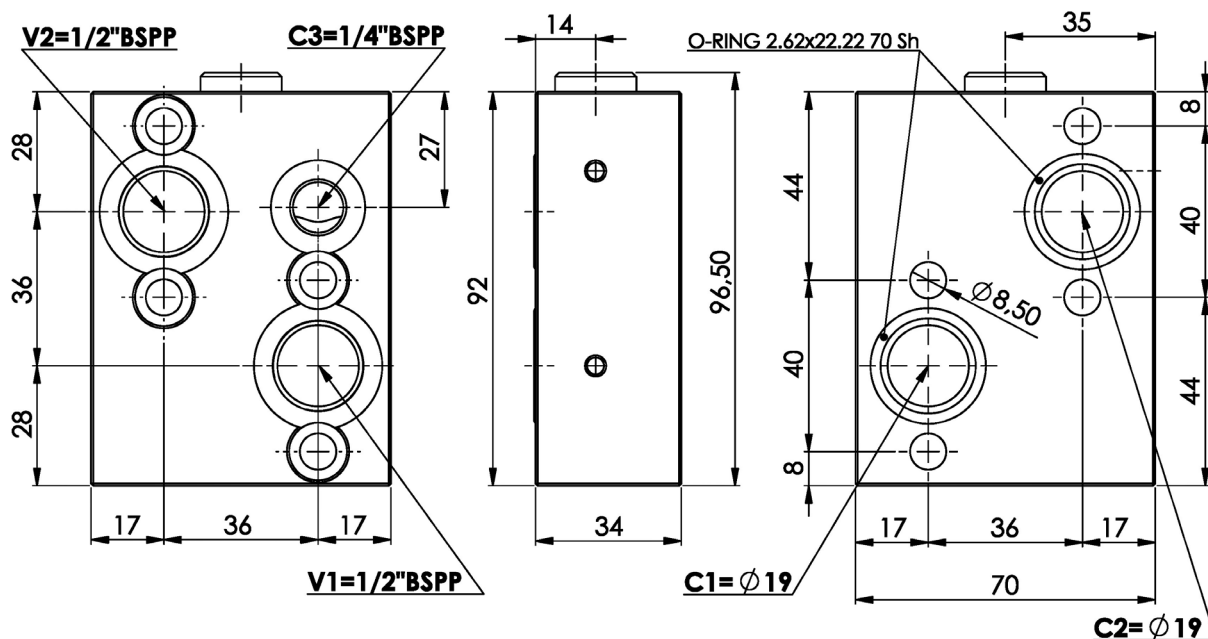

ESEMPIO DI ORDINAZIONE - ORDERING CODE EXAMPLE

F P T D F D 2 1 / 2 *

Guarnizioni - Seals:
V=Viton *

Omettere se BUNA-N - Omit if BUNA-N